


CANNES

SHOWER MIXER AND DIVERTER



Wall plates	Mixer Ø65 mm · diverter Ø40 mm
Valve depth in wall	55–85 mm
Lever	115 mm
Cartridge	Citec ceramic
Body	DZR brass
WaterMark licence	WM-022467 · AS 3718

FINISHES AND PRODUCT CODES

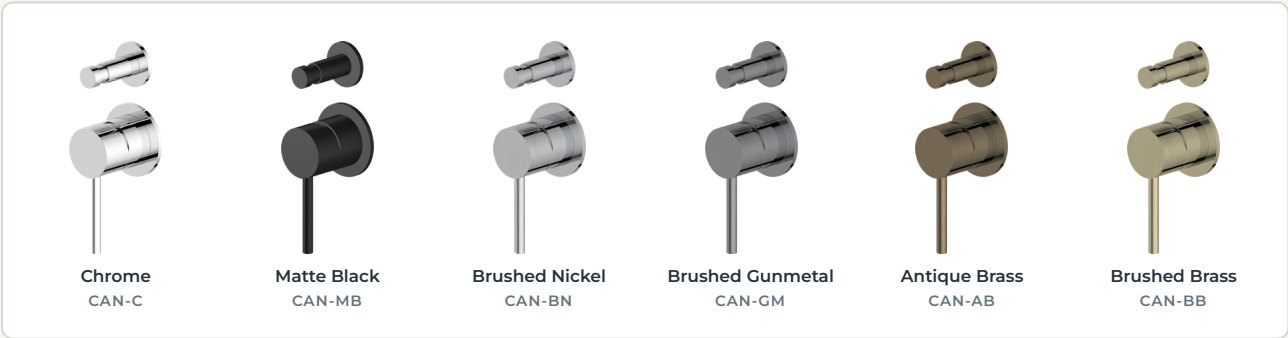

WATER EFFICIENCY


This mixer has no outlet of its own, so it carries no WELS rating. The rating belongs to the outlets it supplies.

CERTIFICATION

WaterMark WM-022467
Certified to AS 3718

Dimensions

All dimensions in millimetres. Drawn from the manufacturer's production drawing.

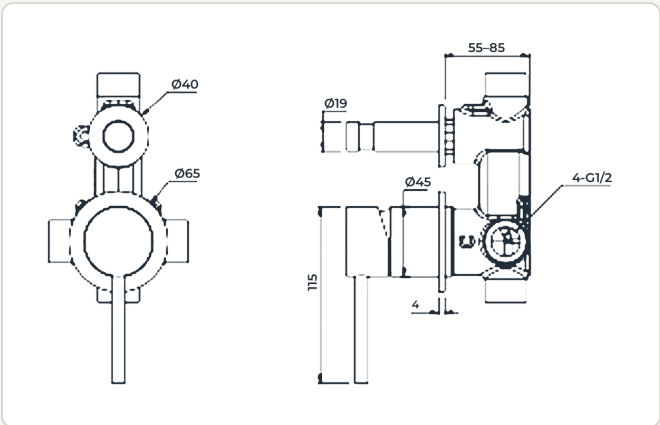

INSTALLATION DATA	
Mounting	In-wall valve with diverter
Valve connections	4 × ½" BSP (hot, cold and two outlets)
Wall box	150 × 100 mm
Mixer to diverter	68 mm, centre to centre
Wall holes	Ø50 mm (mixer) · Ø25 mm (diverter)
Finished depth	55–85 mm
Working pressure	50–800 kPa (factory rating)
Water temperature	5–80 °C
Installation	Licensed plumber, to AS/NZS 3500

WARRANTY	
Tap body	15 years
Cartridges, valves & aerators	7 years
Surface finish	3 years
Washers & O-rings	2 years

Parts warranty for home use, original purchaser and installation, proof of purchase required. Full terms at invoguemirrors.com.au/pages/warranty. In addition to your rights under the Australian Consumer Law.

BEFORE YOU INSTALL

Installation must be carried out by a licensed plumber, to AS/NZS 3500. Set the valve depth before the wall is lined. The installation guide for this product is on the product page.

invoguemirrors.com.au · info@invoguemirrors.com.au