



# COMO

KITCHEN MIXER

## Installation & Owner's Guide

### FINISHES IN THIS GUIDE

|               |                  |
|---------------|------------------|
| <b>COM-C</b>  | Chrome           |
| <b>COM-MB</b> | Matte Black      |
| <b>COM-BN</b> | Brushed Nickel   |
| <b>COM-GM</b> | Brushed Gunmetal |
| <b>COM-AB</b> | Antique Brass    |
| <b>COM-BB</b> | Brushed Brass    |

Read this guide before you begin.

**This product must be installed by a licensed plumber,** to AS/NZS 3500.

**IVM-MAN-COM-AU-01**

Revision A · October 2026 · Australian edition

[invoguemirrors.com.au](http://invoguemirrors.com.au)

# Safety and compliance

Read this page in full before you begin. Share it with your installer.

## ▲ LICENSED PLUMBER

This product must be installed by a licensed plumber. All work must comply with AS/NZS 3500. This is a general guide; your installer may adapt the method to suit your site.

### Before you begin

Unpack the tap and check it for damage and missing parts before anything is fitted. Confirm this is the model and finish you ordered.

### Flush the pipework

Flush the hot and cold supply pipes before connecting the tap, to clear any debris that could damage the cartridge or block the outlet.

### Turn off the water

Turn off the supply at the isolation valves before work starts.

### Water pressure

The tap is rated for **50–800 kPa**. If your supply is above 500 kPa, your plumber will fit a pressure-limiting valve.

### Water temperature

Hot water supply between **5 and 80 °C**.

### Flexible hoses


Don't twist or kink the inlet hoses during or after installation.

## TEST BEFORE YOU FINISH

Test fully for leaks before you tile, line or finish anything that would make the connections hard to reach. We can't cover the cost of removing a product that was not tested before finishing work.

# Your Como

A single-lever kitchen mixer with a high arched spout that swivels a full 360°. All dimensions in millimetres.

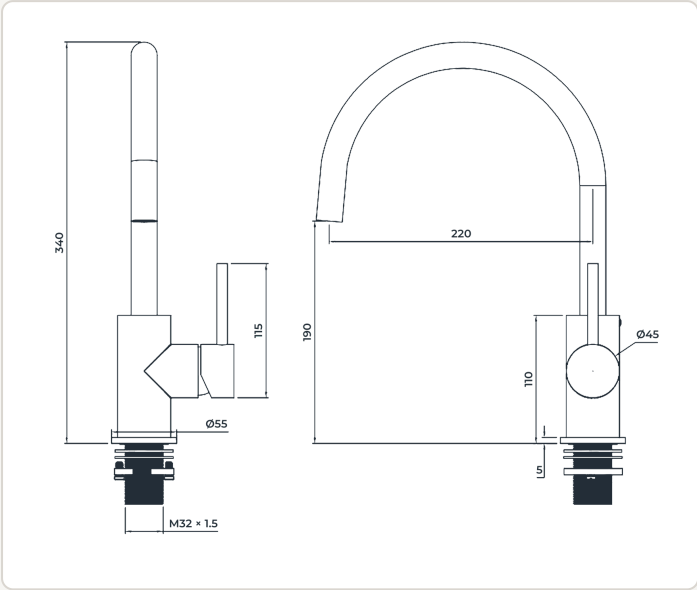

SPECIFICATION

|                       |                     |
|-----------------------|---------------------|
| WELS rating           | 5 Star · 6.0 L/min  |
| WELS registration     | T28127              |
| WaterMark licence     | WM-022467 · AS 3718 |
| Spout reach           | 220 mm              |
| Clearance under spout | 190 mm              |
| Overall height        | 340 mm              |
| Spout                 | Swivels 360°        |
| Tap hole              | Ø35 mm              |
| Body / base diameter  | Ø45 mm / Ø55 mm     |
| Body                  | DZR brass           |
| Cartridge             | Citec ceramic       |

INSTALLATION DATA

|                   |                                           |
|-------------------|-------------------------------------------|
| Mounting          | Single hole, bench or sink                |
| Tap hole          | Ø35 mm                                    |
| Shank thread      | M32 x 1.5                                 |
| Water connection  | ½" BSP flexible hoses to isolation valves |
| Hoses             | Red = hot (left) · Blue = cold (right)    |
| Working pressure  | 50–800 kPa (factory rating)               |
| Water temperature | 5–80 °C                                   |
| Installation      | Licensed plumber, to AS/NZS 3500          |

# Planning

Check these with your installer before anything is cut or fixed.

## Tap hole

One hole, **Ø35 mm**, in the bench or sink. The shank is M32 × 1.5.

## Height

The tap stands **340 mm** above the bench. Check it clears sills, shelves and overhead cabinets.

## Under the spout

There is **190 mm** from the bench to the spout outlet.

## Reach

The outlet sits **220 mm** from the centre of the tap hole. Check it lands over the sink bowl.

## Isolation valves


Hot and cold isolation valves under the sink, each taking a **½" BSP** flexible hose.

## HOT AND COLD

The **red** hose is hot and goes on the **left**. The **blue** hose is cold and goes on the **right**, viewed from the front. Hot and cold are also marked on the handle.


# Installation

The steps follow the manufacturer's method.

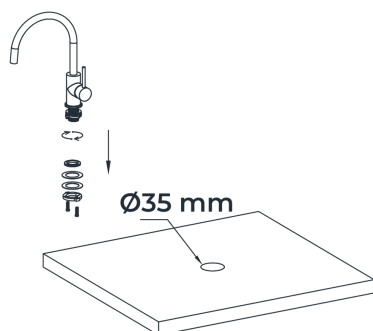


## 1 Prepare the tap

Lay out the parts. Screw the first flexible hose into the base of the tap by hand. Fit one hose at a time.

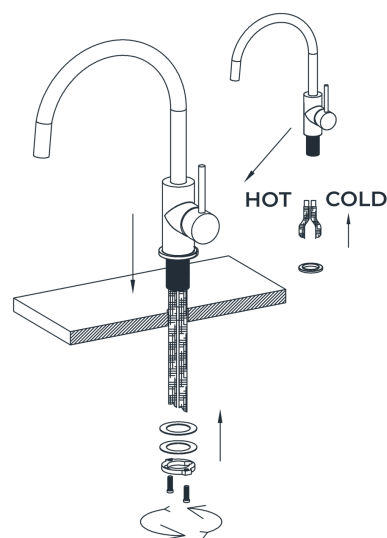


## 2 Fit the tap

Sit the tap over the hole on its base ring. From below, fit the second hose and secure the tap with the fixing kit on the shank.

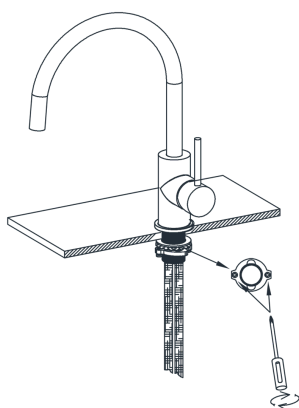

## 3 Connect the hoses

Connect the **red** hose to the hot isolation valve and the **blue** hose to the cold, matching the marks on the handle. Don't twist the hoses.

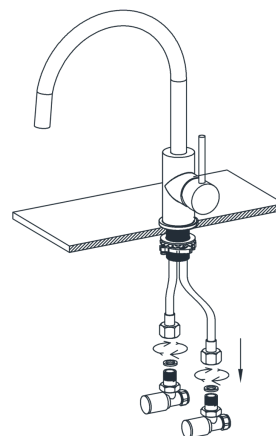

## 4 Test for leaks

Open the valves slowly. Run the tap on full hot and full cold, then check every connection for drips before you finish the cabinetry.

# Using and caring for your Como

**The lever**

The lever controls the flow and the temperature. Hot and cold are marked on the handle.

**Cleaning**

Clean with warm soapy water and a **soft cloth** only. Rinse and dry to keep the finish looking its best.

**Never use**

Cleaners containing acids (including vinegar), chlorine or caustic soda, abrasive powders, scourers or brushes. They damage the finish and are not covered by the warranty.

TROUBLESHOOTING

|                                    |                                                                          |
|------------------------------------|--------------------------------------------------------------------------|
| Flow is low or uneven              | Check the spout outlet is clean and free of debris.                      |
| A connection under the basin drips | Turn off the isolation valve, check the washer is seated and re-tighten. |
| The tap moves on the bench         | Re-tighten the fixing kit under the bench.                               |

Still not right? Email us with your order number (page 07).

# Warranty and support

|                               |          |
|-------------------------------|----------|
| Tap body                      | 15 years |
| Cartridges, valves & aerators | 7 years  |
| Surface finish                | 3 years  |
| Washers & O-rings             | 2 years  |

Parts warranty for home use, original purchaser and installation, proof of purchase required. Full terms at [invoguemirrors.com.au/pages/warranty](http://invoguemirrors.com.au/pages/warranty). In addition to your rights under the Australian Consumer Law.

## QUESTIONS OR A CLAIM

Email us with your order number and a photo of the issue.  
**[info@invoguemirrors.com.au](mailto:info@invoguemirrors.com.au)**  
Full warranty terms:  
[invoguemirrors.com.au/pages/warranty](http://invoguemirrors.com.au/pages/warranty)

## YOUR RECORD

Finish and product code

Date purchased

Order number

Installed by

Installation date